


Dredging Bucket Wheel



Dredging Bucket Wheel Performance and Features:

1. Low operating costs, easy to maintenance.
2. Constant feed rate to mining treatment plants.
3. Smooth dredging process.
4. Accurate selective dredging at flat bottom profile.
5. Upward and downward cutting models available.
6. Reduced risk of large clay ball formation.
7. Larger debris cannot enter the wheel.
8. Equal production in both directions of swing.
9. High production and low spillage.

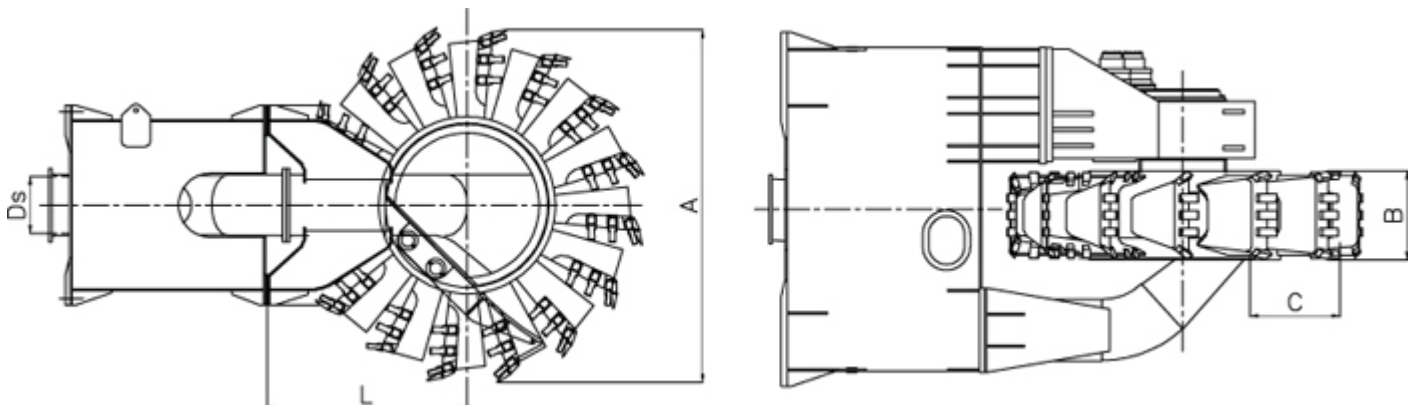

structural drawing

Technical Specifications

Suction tube dia.(mm)	Max dia. of wheel	Width	Height	Centre height	Rotate speed (rpm)	Power(kw)
450	2700	550	650	1550	0-26	110
550	3500	750	800	1875	0-22	270
600	3800	750	820	2030	0-20	350
650	4000	780	860	2255	0-18	380
700	4400	900	995	2490	0-16	558
850	6000	1300	1300	3300	0-15	900

NOTE: Providin Dredging Bucket Wheel products series of all specifcations and demensions;customization is available.



Chongqing Hi-Sea Marine Equipment Import&Export Co.,Ltd.

Address: 20-5,General Chamber of Commerce Building, No.2 Hongjin Street, Yubei District, Chongqing, China

Email: machine@hiseamarine.com mitang0708@foxmail.com **Skype:** cncqtang **QQ:** 2278612160

TEL: +86-23-67032301 **FAX:**+86-23-67955123 **Mobile:** +86-18108354610 **Post Code:**401147

Website: www.hiseamarine.com www.chinahisea.com