


## Flange Dredging Hose



### PERFORMANCE AND FEATURES:

The dredging hoses are used together with dredgers to transport silt and gravel. Pipe wall thickness from 18mm to 70mm. Optimum operating temperature from minus 20 °C to 50 °C. Easy to install, flexible, safe, wear-resistant and bending-resistant.

Structure of flange dredging hose

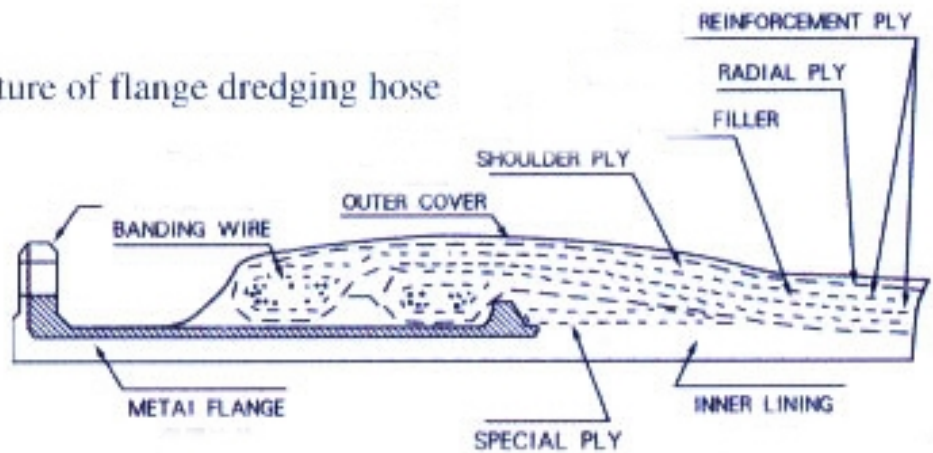

Structure of flange dredging hose

### Technical Specifications

ID		Working pressure (Mpa)	ID			Length (m)
mm	Tolerance (mm)		Hole No.	Hole Dia. (mm)	Hole Distance (mm)	
200	±3	0.5	12	25	295	0~10
203	±3	0.5	8	22	300	0~10
250	±3	0.5	12	30	390	0~10
250	±3	0.5	12	23	355	0~10

300	±5	0.5	12	20	390	0~10
300	±5	0.5	12	28	410	0~10
350	±5	0.8	12	23	445	0~10
400	±5	0.8	16	26	515	0~10
400	±5	0.8	16	25	520	0~10
450	±5	0.6	20	26	565	0~10
450	±5	0.6	12	18	510	0~10
500	±5	1.5	20	26	620	0~10
500	±5	1.5	16	25	600	0~10
500	±5	1.5	20	22	640	0~10
560	±5	1.5	20	22	660	0~10
600	±5	1.5	22	27	750	0~10
650	±5	2.0	24	27	780	0~10
700	±5	2.0	24	27	840	0~10
700	±5	2.0	24	28	810	0~10
700	±5	2.0	24	30	850	0~10
700	±5	2.0	24	30	860	0~10
800	±5	2.0	32	30	970	0~10
850	±5	2.0	34	24	1020	0~10
900	±5	2.0	42	28	1130	0~10
950	±5	2.0	42	28	1130	0~10
1000	±5	2.0	42	28	1190	0~10
1100	±5	2.0	42	32	1280	0~10

**Note:** Other technical parameter can be made according to the client's requirement.



Flange dredging hose in warehouse

**Chongqing Hi-Sea Marine Equipment Import&Export Co.,Ltd.**

**Address:** 20-5,General Chamber of Commerce Building, No.2 Hongjin Street, Yubei District, Chongqing, China

**Email:** machine@hiseamarine.com mitang0708@foxmail.com **Skype:** cncqtang **QQ:** 2278612160

**TEL:** +86-23-67032301 **FAX:**+86-23-67955123 **Mobile:** +86-18108354610 **Post Code:**401147

**Website:** www.hiseamarine.com www.chinahisea.com