


Flange Suction Hose



PERFORMANCE AND FEATURES:

The suction hoses are used together with dredgers to transport silt and gravel. Pipe wall thickness from 31mm to 58mm. Optimum operating temperature from minus 20 °C to 50 °C. Easy to install, flexible, safe, wear-resistant and bending-resistant.

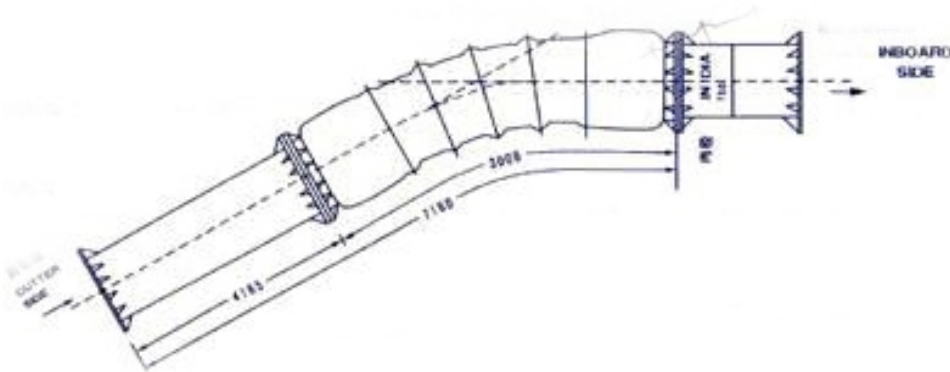

Structure of flange suction hose

Technical Datas

ID		Working pressure (Mpa)	Thickness of flange (mm)	ID			Length (m)
mm	Tolerance (mm)			Hole No.	Hole Dia. (mm)	Hole Distance (mm)	
400	±2.0	Working pressure is 80kpa	32	16	22	540	0-10
400	±2.0		32	16	27	515	0-10
400	±2.0		32	16	25	510	0-10
600	±3.0		34	20	28	720	0-10
700	±3.0		35	24	30	840	0-10
700	±3.0		25	24	26	840	0-10
700	±3.0		35	24	32	860	0-10
750	±3.0		35	24	32	890	0-10
800	±4.0		35	24	28	960	0-10
900	±4.0		30	28	40	1050	0-10
900	±4.0		30	28	34	1070	0-10
900	±4.0		35	28	45	1130	0-10

Note: other specification are available upon request.



Chongqing Hi-Sea Marine Equipment Import&Export Co.,Ltd.

Address: 20-5,General Chamber of Commerce Building, No.2 Hongjin Street, Yubei District, Chongqing, China

Email: machine@hiseamarine.com mitang0708@foxmail.com **Skype:** cncqtang **QQ:** 2278612160

TEL: +86-23-67032301 **FAX:**+86-23-67955123 **Mobile:** +86-18108354610 **Post Code:**401147

Website: www.hiseamarine.com www.chinahisea.com