

Quadruple Quick Release Hook:

1.Product description:

operating force by handle: <150N

pull of hook body for one unit: 350-2500KN

quantity of hook body for one handle: 1hook

swing angle of hook body in vertical: 450

swing angle of hook body in horizontal: 45~900

puling speed of electric capstan: 18~25m/min

pull of electric capstan: 10KN~30KN

working diameter of capstan:250mm

Matriel:hook body:quality alloy.

Quick release hook will be entirely sprayed with zinc and the thickness.

2.Mainfeatures:

Quick operate cable-laying ,bond cable, release cable easily.

Self locking mechanism make sure bond cable ,manual. electric or hydraulic release control lever.

Full load or zero load the anchor can quick release.

Elasticity cushion rubber let it no spark.

Vertical Type


Feature:1. Iner brake explosion protection electric motor, safe brake performance, use vertical footing fix installation .

Reduction gearbox: helical gearbox, planetary gearbox, spindle wheel swinging gearbox

Horizontal type

Feature:1.Normal explosion protection electric motor, footing fix installation .

3.Specification:

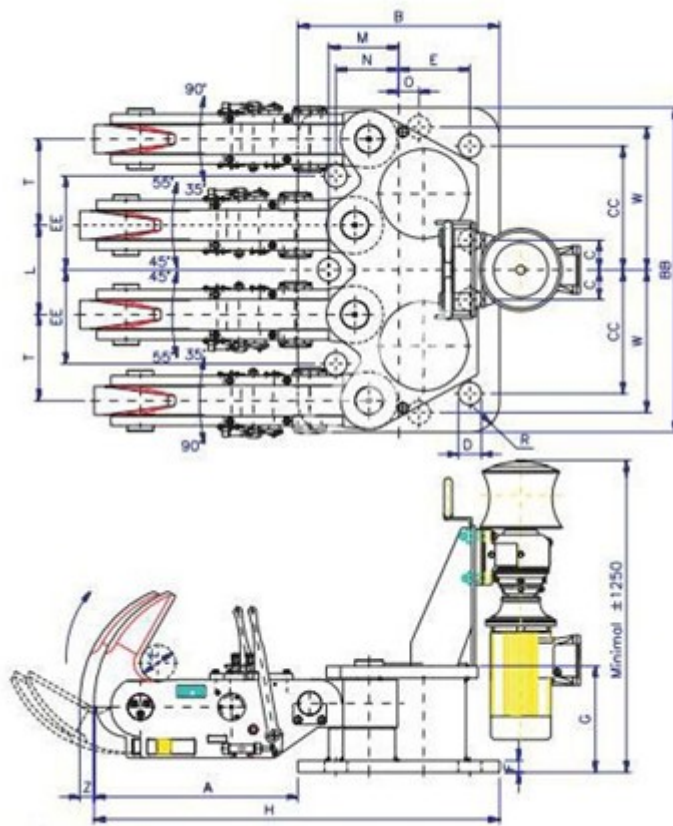

S.W.L	Cap.	Wt.	A	B	BB	C	D	E	EE	F	G	H	K	L	M	O	R	X
400	1200	707	598	700	800	310	62	260	145	35	370	1296	96	290	275		90	6*M56
600	1800	1268	863	800	900	335	70	310	162	45	407	1663	130	325	310	65	100	6*M64
750	2250	1540	893	850	1000	375	78	325	175	45	417	1743	130	350	325	60	100	6*M72
1000	3000	2144	959	900	1060	400	78	350	190	50	417	1859	150	380	322	55	100	6*M72
1250	3750	2450	1030	900	1060	400	86	350	190	55	479	1930	150	380	322	55	100	7*M80
1500	4500	3586	1235	1020	1200	475	96	385	212	55	499	2255	150	425	385	115	125	7*M90

4. Certificates: ABS, BV, GL, CCS, RINA, DNV, KR, NK, LR are available at request.