


Dredge Bow Coupling



Introduction of Bow Blowing Device for TSHD:

Bow Blowing Device is mainly used for deck pipeline and the shore pipe connection, main part is welded of high strength ship plate. Equipped with a hydraulic quick connection device, when in use wunch and quick spherical joint connect to pipeline on the other side of the river or dumping through Rainbow nozzle directly.

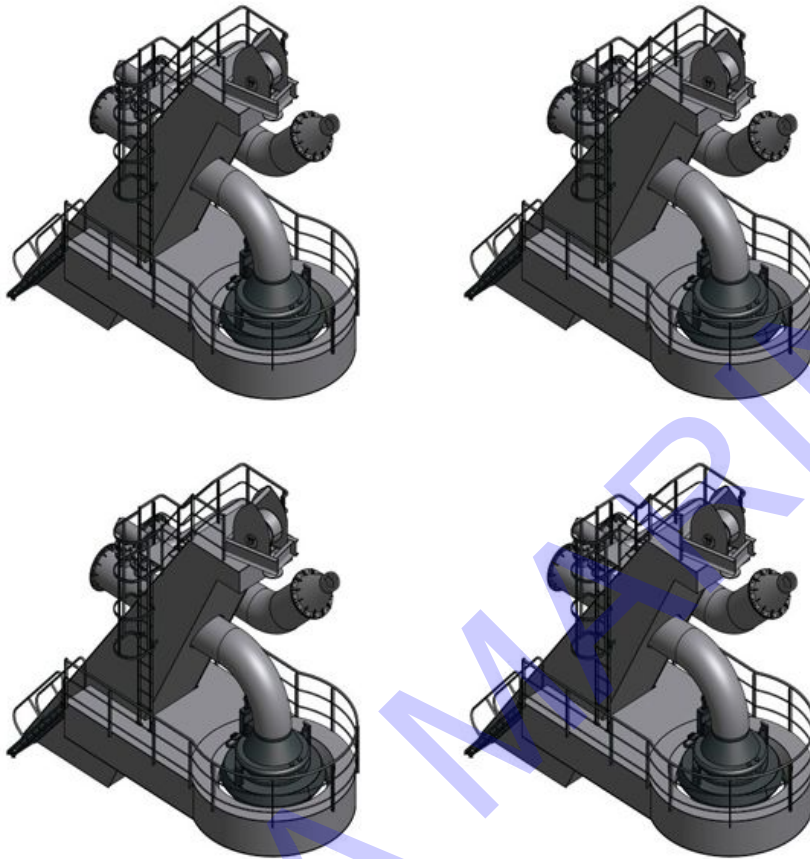

Technical Specifications

| Iner Dia. of Pipe (mm) | A(mm) | B(mm) | C(mm) | D(mm) | Weight(kg) | Winch pull(kn) |
|------------------------|-------|-------|-------|-------|------------|----------------|
| 500 | 3500 | 4800 | 3100 | 1350 | 8000 | 125 |
| 600 | 3500 | 4800 | 3100 | 1350 | 11000 | 150 |
| 700 | 4700 | 6900 | 3600 | 1500 | 18000 | 250 |
| 800 | 5000 | 7400 | 3800 | 1700 | 20000 | 300 |
| 900 | 5000 | 8000 | 4000 | 1800 | 22000 | 300 |
| 1000 | 6000 | 8500 | 4400 | 2000 | 24000 | 400 |

Note: We can provide other size of bow blowing device according to demand of user.



Chongqing Hi-Sea Marine Equipment Import&Export Co.,Ltd.

Address: 20-5,General Chamber of Commerce Building, No.2 Hongjin Street, Yubei District, Chongqing, China

Email: machine@hiseamarine.com mitang0708@foxmail.com **Skype:** cncqtang **QQ:** 2278612160

TEL: +86-23-67032301 **FAX:**+86-23-67955123 **Mobile:** +86-18108354610 **Post Code:**401147

Website: www.hiseamarine.com www.chinahisea.com