

## Floating Rubber Hose




### **Performance and Features:**

1. Can withstand high working pressure, design pressure are not less than 3 times of working pressure, which insure high safety.
2. Excellent abrasion resistance, weatherability and seawater corrosion resistance.
3. Good resistance to wind and waves, also beacon anti-collision and indicative.
4. Independent foam floating layer, insure sealed and water non-absorbent, the surface part above water are not less than 20% of total volume.
5. Bending angle: under working condition, the bending angle is from 0o to 45o.

**Technical Specifications**

ID (mm)	500	600	700	800	900	1000	1100
Working Pressure(Mpa)	1.2	1.5	1.5-2.5	1.5-2.5	1.5-2.5	1.5-2.5	1.5-2.5
Length(m)	0-10	0-10	0-10	0-10	0-10	0-10	0-10

**Note:** Other specification are available upon request.

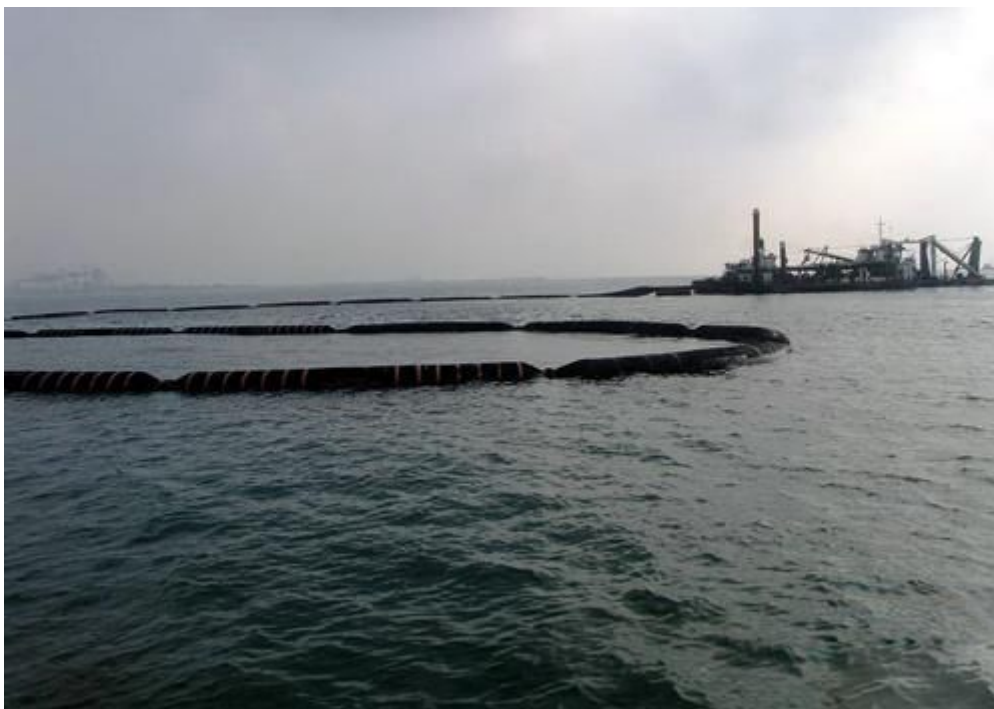

Floating hose in overseas construction site

**Chongqing Hi-Sea Marine Equipment Import & Export Co.,Ltd.**

**Add:**15F,Jinshan Matrix A, Saidi Rd., New North Zone, Chongqing , China, 401122.

**Tel:** +86-23-67304326 EXT8016    **Fax:** +86-23-67956622(manual)    **Mob:** +86-18108354610    +86-15215103815

**Email:** [dredge-component@foxmail.com](mailto:dredge-component@foxmail.com)    [machine@hiseamarine.com](mailto:machine@hiseamarine.com)

**Website:** [www.hiseadredge.com](http://www.hiseadredge.com)    [www.chinahisea.com](http://www.chinahisea.com)    [www.hiseamarine.com](http://www.hiseamarine.com)