



Cummins series marine generator

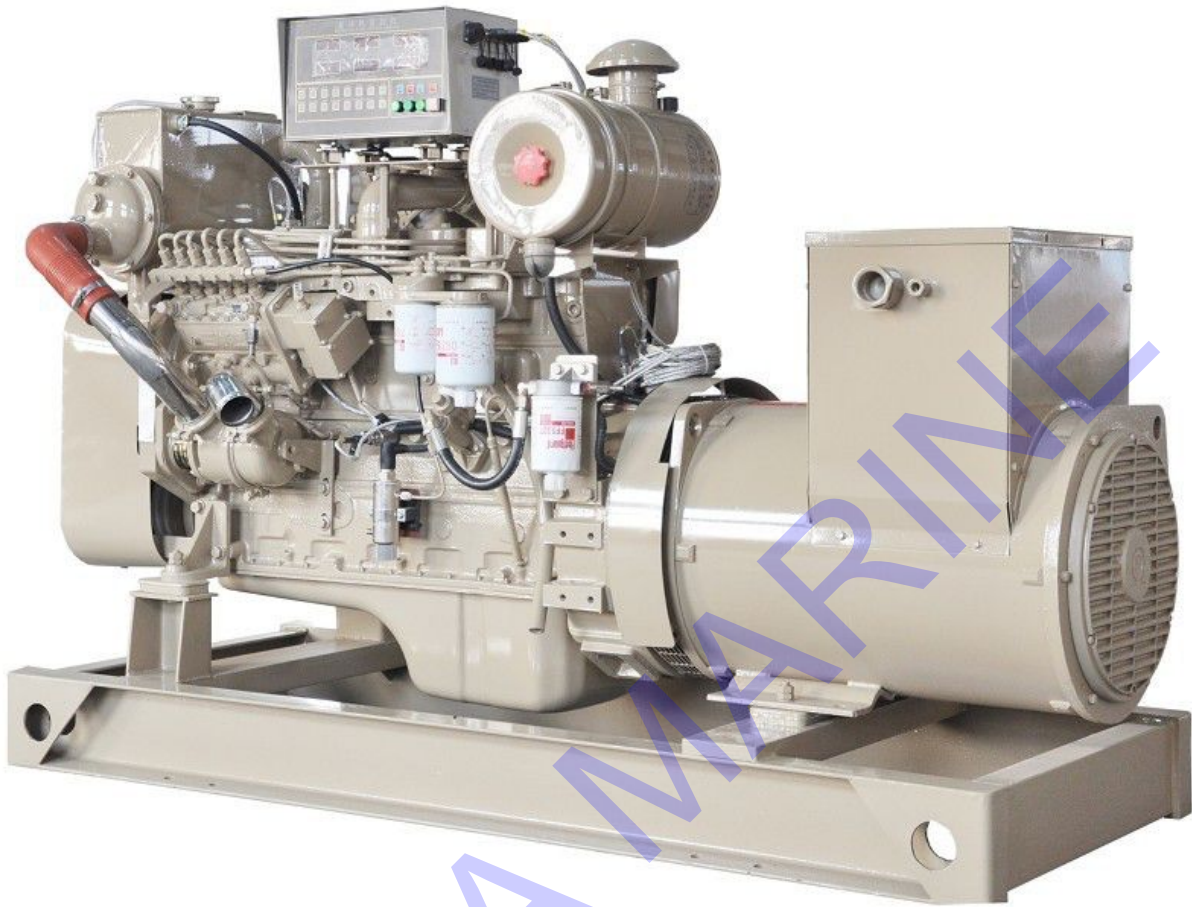

Cummins series diesel generator features:

1. Power range 50KVA-1125KVA, 40Kw-900Kw
2. 50Hz/1500RPM
3. Powered by Cummins engine coupled with Marathon Alternator, SUNVIM, Stamford, Siemens alternator are optional
4. EIAPP (Nox) certificate, CCS, BV approved
5. The marine generator sets powered by the diesel engines which obtain International Air pollution Prevention Certificate—Second Stage Certificate are available for waters with more strict air pollution emissions requirements. The models of these diesel engines with the second stage certificate include: N855-DM、K19-DM、K38-DM.

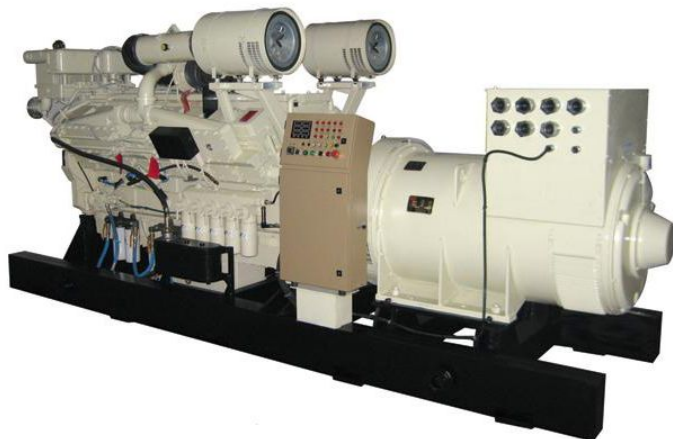

TECHNICAL SPECIFICATIONS

Genset Specification			Engine Specification					Alternator Specification		Unit appearance	
Model	Rated Output		Fre/ Volt Hz/V	Model	Power/Speed Kw/RPM	Cyl.	Fuel consumption (L/H)	Model		Dimension L×W×H(mm)	Weight (Kgs)
	Kw	KVA						Marathon	Sunvim		
CCFC40JW	40	50	50/400	4BTA3.9-GM47	47/1500	4	10.02	MP-H-40-4	SVH224	1670*850*1270	800
CCFC50JW	50	63	50/400	6BT5.9-GM83	83/1500	6	12.47	MP-H-50-4	SVH224	1900*895*1300	1000
CCFC64JW	64	80	50/400	6BT5.9-GM83	83/1500	6	15.96	MP-H-64-4	SVH274	1900*900*1300	1100
CCFC75JW	75	93.8	50/400	6BTA5.9-GM100	100/1500	6	18.71	MP-H-75-4	SVH 274	1920*895*1300	1250
CCFC90JW	90	113	50/400	6BTA5.9-GM100	100/1500	6	22.45	MP-H-90-4	SVH 274	1995*895*1300	1300
CCFC100JW	100	125	50/400	6CT8.3-GM115	115/1500	6	24.94	MP-H-100-4	SVH 274	2110*810*1360	1650
CCFC120JW	120	150	50/400	6CTA8.3-GM155	155/1500	6	29.93	MP-H-120-4	SVH 274	2110*810*1360	1700
CCFC150JW	150	188	50/400	NT855-DM	180/1500	6	36.71	MP-H-150-4	SVH 274	2685*995*1790	1750
CCFC180JW	180	225	50/400	NT855-DM	205/1500	6	42.60	MP-H-180-4	SVH 314	2690*995*1790	2900
CCFC200JW	200	250	50/400	NTA855-DM	240/1500	6	48.94	MP-H-200-4	SVH 314	2760*995*1790	3100
CCFC250JW	250	313	50/400	NTA855-DM	284/1500	6	61.18	MP-H-250-4	SVH 314	2760*995*1790	3180
CCFC270JW	270	338	50/400	NTA855-DM	306/1500	6	66.07	MP-H-270-4	SVH 314	2850*995*1790	3250
CCFC280JW	280	350	50/400	NTA855-DM	317/1500	6	68.52	MP-H-300-4	SVH 354	2998*995*1790	3250
CCFC300JW	300	375	50/400	KTA19-DM	336/1500	6	44.8	MP-H-300-4	SVH 354	3170*1000*1905	3750
CCFC350JW	350	438	50/400	KTA19-DM	403/1500	6	49.5	MX-H-350-4	SVH 354	3170*1000*1905	3800
CCFC400JW	400	500	50/400	KTA19-DM	448/1500	6	54.2	MX-H-400-4	SVH 354	3170*1000*1905	3950
CCFC500JW	500	625	50/400	KT38-DM	560/1500	12	78.5	MX-H-500-4	SVH 354	3950*1500*2500	6200
CCFC600JW	600	750	50/400	KTA38-DM	664/1500	12	87.5	MX-H-630-4	SVH 404	4100*1500*2500	6350
CCFC700JW	700	875	50/400	KTA38-DM	814/1500	12	104.73	MX-H-750-4	SVH 404	4100*1500*2500	6500
CCFC800JW	800	1000	50/400	KTA38-DM	880/1500	12	109.4	MX-H-830-4	SVH 404	4100*1500*2500	7000
CCFC900JW	900	1125	50/400	QSK38-DM	984/1500	12	128.9	MX-H-1000-4	SVH 454	4250*1500*2500	7200



marine Cummins generator



cummins marine gensets in factory



Chongqing Hi-Sea Marine Equipment Import&Export Co.,Ltd.

Address: 20-5,General Chamber of Commerce Building, No.2 Hongjin Street, Yubei District, Chongqing, China

Email: machine@hiseamarine.com mitang0708@foxmail.com **Skype:** cncqtang **QQ:** 2278612160

TEL: +86-23-67032301 **FAX:**+86-23-67955123 **Mobile:** +86-18108354610 **Post Code:**401147

Website: www.hiseamarine.com www.chinahisea.com