



15 Degrees Tilting Angle Dredge Ball Joint

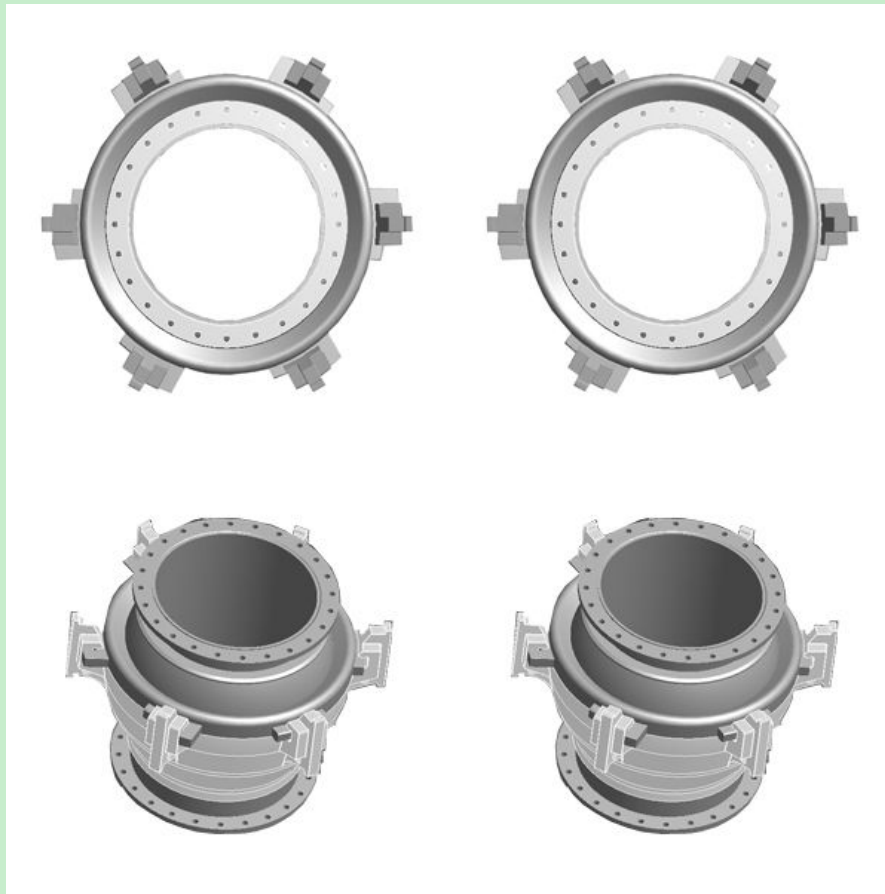

Dredge ball joint benefits:

1. Easy assembly and dis-assembly
2. Low maintenance required
3. Low friction between ball and gland due to grease grooves and polished ball and gland face
4. Replaceable liners made from wear resistant materials
5. Quick fix and release of locking

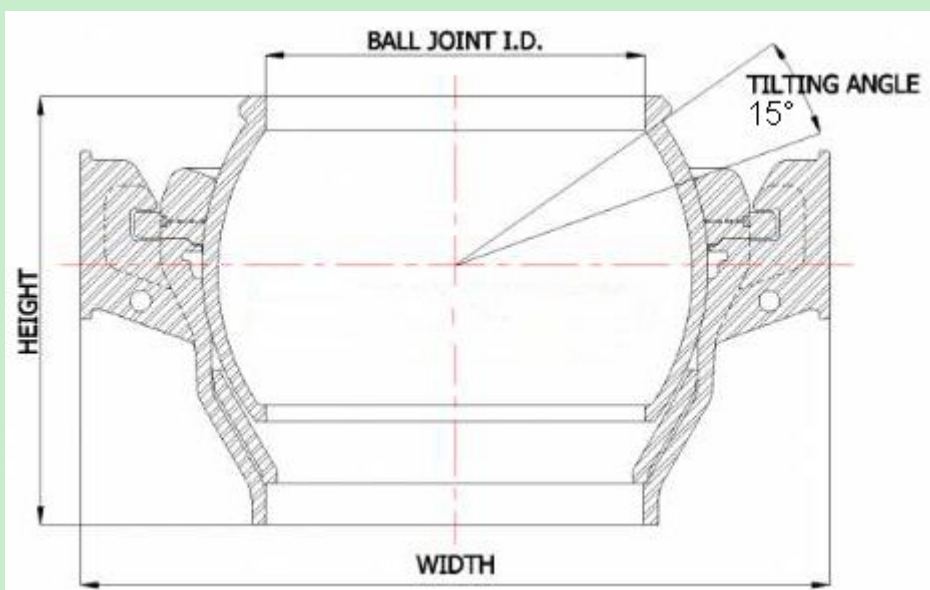

drawing of 15°dredge ball joint



Technical Specifications

15 Degrees tilting angle										
		10 Bar			20 Bar			30 Bar		
Pipe ID mm	Ball joint ID mm	Height mm	Width mm	Weight kg	Height mm	Width mm	Weight kg	Height mm	Width mm	Weight kg
400	428	416	796	233	504	851	330	562	900	423
500	536	524	1,000	471	624	1,065	644	712	1,130	856
550	586	561	1,088	602	681	1,168	855	774	1,237	1,120
650	694	663	1,285	1,001	798	1,379	1,408	904	1,457	1,828
700	744	711	1,379	1,264	853	1,479	1,742	966	1,560	2,243
800	854	812	1,576	1,846	970	1,690	2,590	1,091	1,780	3,339
850	904	852	1,666	2,189	1,022	1,787	3,110	1,174	1,898	4,058
1,000	1,066	1,004	1,964	3,583	1,207	2,106	5,039	1,362	2,220	6,480
1,100	1,166	1,094	2,154	4,756	1,324	2,296	6,622	1,500	2,441	8,663
1,200	1,266	1,167	2,328	5,943	1,426	2,496	8,548	1,644	2,680	11,584

NOTE:We can provide customer with the best suitable solution and lowest cost , the dredge ball joints are designed in six different types, giving variations of tilting angle from 15 to 18 degrees and duties from 10 bar to 30 bar.

Chongqing Hi-Sea Marine Equipment Import&Export Co.,Ltd.

Address: 20-5,General Chamber of Commerce Building, No.2 Hongjin Street, Yubei District, Chongqing, China

Email: machine@hiseamarine.com mitang0708@foxmail.com **Skype:** cncqtang **QQ:** 2278612160

TEL: +86-23-67032301 **FAX:**+86-23-67955123 **Mobile:** +86-18108354610 **Post Code:**401147

Website: www.hiseamarine.com www.chinahisea.com